

Isobaric Vapor–Liquid Equilibria and Excess Volumes for the Binary Mixtures Water + Sulfolane, Water + Tetraethylene Glycol, and Benzene + Tetraethylene Glycol

Yang-Xin Yu, Jian-Gang Liu, and Guang-Hua Gao*

Department of Chemical Engineering, Tsinghua University, Beijing 100084, People's Republic of China

Isobaric vapor–liquid equilibrium data were determined at 101.33 kPa for the binary mixtures of water + sulfolane and water + tetraethylene glycol. Calculations of the nonideality of the vapor phase were made with the second virial coefficients obtained from the Hayden–O'Connell method. The boiling points and vapor-phase compositions reported were well correlated by the Wilson, NRTL, and UNIQUAC models. In addition, the densities of binary mixtures of water + sulfolane, water + tetraethylene glycol, and benzene + tetraethylene glycol were determined over the entire concentration range at 298.15 K and atmospheric pressure by using an oscillating tube densimeter. Excess volumes were calculated for each data point. All mixtures exhibit negative excess volumes with a minimum which occurs at $x \cong 0.5$ for the benzene + tetraethylene glycol system; it is shifted toward the water-rich region for the water + sulfolane and water + tetraethylene glycol systems. The experimental excess volumes were correlated using the Redlich–Kister equation.

Introduction

Solvent extraction is one of the most important methods to produce high-purity aromatic extracts from catalytic reformates. In recent years, sulfolane or tetraethylene glycol has been employed more and more in new or improved extraction processes. Therefore, it is necessary to have complete thermodynamic data for these systems. Several researchers^{1–4} have studied the vapor–liquid and liquid–liquid equilibria for mixtures containing an aromatic and sulfolane or tetraethylene glycol. Herskowitz and Gottlieb⁵ reported the activity coefficients of the solvent in the water + tetraethylene glycol system by an isopiestic method at 298.15 K.

For the volumetric properties, excess volumes for a nitrile + sulfolane^{6,7} and an aromatic hydrocarbon + sulfolane^{2,8} have been well documented for a reasonable range of temperature. To our knowledge, for the systems involving tetraethylene glycol, only aqueous solutions and solutions with HFC-134a have been studied.⁹ Lepori and Mollica¹⁰ have reported the volumetric properties of dilute aqueous solutions of tetraethylene glycol, and some density data for this system have been given by Müller and Rasmussen.¹¹

In this work, the isobaric vapor–liquid equilibrium data for the mixtures of water + sulfolane and water + tetraethylene glycol were measured at 101.33 kPa, and the excess volumes of water + sulfolane, water + tetraethylene glycol, and benzene + tetraethylene glycol systems were reported at 298.15 K, covering the whole concentration range.

Experimental Section

Chemicals. Pure benzene and sulfolane were obtained from Beijing Chemical Engineering Plant. Tetraethylene glycol was procured from Beijing Yanshan Petrochemical Company. All the chemicals were purified by distillation (sulfolane and tetraethylene glycol distilled under vacuum),

Table 1. Densities (ρ) and Refractive Indices (n_D) of Pure Components and Comparison with Literature Values at 298.15 K

component	$\rho/\text{g}\cdot\text{cm}^{-3}$		n_D	
	exptl	lit.	exptl	lit.
benzene	0.873 51	0.873 60 ^a	1.4979	1.49792 ^a
sulfolane	1.265 64 ^b	1.264 0 ^{a,b}	1.4819 ^d	1.4816 ^{a,d}
		1.266 00 ^c		
		1.119 3 ^f		
tetraethylene glycol	1.120 06	1.120 30 ^e	1.4570	1.4570 ^g

^a Riddick et al.¹² ^b Extrapolated value. ^c Interpolated data from Jannelli et al.⁶ ^d Data at 303.15 K. ^e Data from Müller and Rasmussen.¹¹ ^f Interpolated data from Kumagai et al.⁹ ^g Data from Daubert and Danner.¹³

and their middle fractions were collected. Then they were dried using type 0.5 nm molecular sieves and the water content was found to be <0.01 mass%, as determined with a Mitsubishi moisture meter (Model CA-05). To minimize the contact of these deliquescent reagents with moist air, all the purified chemicals were kept in sealed bottles in desiccators. Doubly distilled water was used in all solutions.

The purity was tested by GLC, which indicated a minimum purity of 99.8 mol %, and no appreciable peaks of impurities were detected. The densities and refractive indices of the purified chemicals are reported in Table 1 in comparison with the literature data at 298.15 K and atmospheric pressure.

Vapor–Liquid Equilibrium Measurements. An inclined ebulliometer with a pumplike stirrer developed by Zhou et al.¹⁴ and described by Yu et al.³ was used. It is a recirculation type, in which both liquid and vapor phase recirculate continuously, and the equilibrium compositions of both phases can be determined. The ebulliometer was operated at atmospheric pressure (101.33 kPa). The steady state was usually reached after 1.5 h of operation. The temperature in the equilibrium chamber was measured

using a mercury thermometer. The uncertainty in the temperature measurement is ± 0.05 K.

The compositions of the sampled liquid phase and vapor phase were analyzed by measuring their densities at 298.15 K with a vibrating tube densimeter, after calibration with gravimetrically prepared standard solutions. The accuracy of the equilibrium composition measurements was ± 0.0003 mole fraction. Since there is a large difference between the boiling points of water and of tetraethylene glycol, the amount of tetraethylene glycol present in the vapor phase was so small that it was not detected by the densimeter. Therefore, the vapor-phase composition was not measured for the water + tetraethylene glycol system.

Density Measurements. An Anton Paar (Graz, Austria) DMA60 oscillating tube densimeter equipped with a density measuring cell (DMA602) was used to measure densities of pure components and binary mixtures at 298.15 K. The temperature of the U-shaped tube was checked continuously using a calibrated digital thermometer (Anton Paar DT100–20) with an accuracy of ± 0.01 K. The system was maintained at constant temperature to within ± 0.005 K by means of a Hetotherm ultrathermostated water bath (Heto, Type CB7). All the measurements were carried out at atmospheric pressure.

The density determination is based on measuring the period of oscillation of a vibrating U-shaped hollow tube that is filled with the sample. The relation between the period τ and density ρ is

$$\rho = A(\tau^2 - B) \quad (1)$$

where A and B are temperature-dependent constants determined by calibration with doubly distilled water and dry air. The precision for the measured period τ is 1×10^{-6} s, which leads to a precision in densities and excess molar volumes of $\pm 5 \times 10^{-5} \text{ g}\cdot\text{cm}^{-3}$ and $\pm 3 \times 10^{-3} \text{ cm}^3\cdot\text{mol}^{-1}$, respectively.

The apparatus, the mixture standard sample preparation, and the procedure of density measurements have been described elsewhere.^{15,16}

The density ρ of the binary solutions was used to calculate the excess molar volume V^E , according to

$$V^E/\text{cm}^3\cdot\text{mol}^{-1} = \frac{x_1M_1 + x_2M_2}{\rho} - \frac{x_1M_1}{\rho_1} - \frac{x_2M_2}{\rho_2} \quad (2)$$

where x_i is the mole fraction, M_i is the molar mass, and ρ_i is the density of component i .

Results and Discussion

Isobaric vapor–liquid equilibria were measured at 101.33 kPa for water + sulfolane and water + tetraethylene glycol systems. The results are shown in Tables 2 and 3, respectively. The liquid-phase activity coefficients γ_i were calculated with

$$\phi_i y_i P = \gamma_i x_i P_i^{\text{sat}} \phi_i^{\text{sat}} \exp\left[\frac{V_i^L(P - P_i^{\text{sat}})}{RT}\right] \quad (3)$$

where ϕ_i and ϕ_i^{sat} are the fugacity coefficients of component i in the mixture and pure vapor, respectively. T is the equilibrium temperature, P is the pressure, P_i^{sat} is the saturated vapor pressure, V_i^L is the saturated liquid molar volume, x_i is the liquid-phase molar fraction, and y_i is the vapor-phase molar fraction of component i .

The vapor pressures of the pure components were obtained using fitted parameters from Reid et al.,¹⁷ Riddick

Table 2. Vapor–Liquid Equilibrium Data for Water (1) + Sulfolane (2) Mixtures at 101.33 kPa

T/K	x_1	y_1^a	γ_1^b	γ_2^b
373.15	1.0000	1.0000	1.000	
373.45	0.9902	0.9999	1.000	5.318
373.77	0.9786	0.9998	1.001	4.786
374.18	0.9620	0.9997	1.003	3.955
375.18	0.9153	0.9995	1.018	2.803
376.51	0.8372	0.9993	1.063	1.902
379.00	0.6751	0.9988	1.210	1.433
381.86	0.5502	0.9982	1.348	1.339
383.20	0.5041	0.9979	1.407	1.323
385.78	0.4331	0.9975	1.504	1.210
390.48	0.3423	0.9968	1.636	1.058
396.82	0.2653	0.9952	1.731	1.050
402.58	0.2192	0.9934	1.760	1.041
413.38	0.1522	0.9885	1.853	1.040
423.11	0.1112	0.9825	1.940	1.009
454.23	0.0484	0.9409	2.019	1.005
560.51	0.0000	0.0000		1.000

^a Experimental values. ^b Calculated from the experimental data.

Table 3. Vapor–Liquid Equilibrium Data for Water (1) + Tetraethylene Glycol (2) Mixtures at 101.33 kPa

T/K	x_1	y_1^a	γ_1^b	γ_2^a
373.15	1.0000	1.000 00	1.000	
373.58	0.9937	1.000 00	0.992	0.686
373.75	0.9891	1.000 00	0.991	0.690
374.79	0.9596	1.000 00	0.985	0.713
375.21	0.9465	1.000 00	0.984	0.723
376.10	0.9196	1.000 00	0.982	0.743
377.11	0.8907	1.000 00	0.980	0.763
378.65	0.8506	1.000 00	0.973	0.790
384.11	0.7242	0.999 99	0.952	0.862
387.36	0.6668	0.999 98	0.931	0.888
395.60	0.5175	0.999 93	0.926	0.941
404.77	0.3938	0.999 82	0.924	0.969

^a Calculated values from NRTL equation. ^b Calculated from the experimental data when tetraethylene glycol in the vapor phase was neglected.

Table 4. Coefficients Used in the Determination of the Pure Vapor Pressure of the Component

component	A	B	C	D
water ^a	-7.764 51	1.45838	-2.77580	-1.233 03
sulfolane ^b	27.807 3	4350.7	6.5633	
tetraethylene glycol ^c	9.447 60	4051.160	-36.521	

^a Coefficients¹⁷ of the equation $\ln(P^{\text{sat}}/P_c) = (1-x)^{-1}(Ax + Bx^{1.5} + Cx^3 + Dx^6)$, where $x = 1 - T/T_c$, P^{sat} is the saturated pressure, P_c is the critical pressure, and T_c is the critical temperature.

^b Coefficients¹² of the equation $\log(P^{\text{sat}}/\text{kPa}) = A - B/(TK) - C \log(TK)$. ^c Coefficients¹⁸ of the equation $\log(P^{\text{sat}}/\text{kPa}) = A - B/(TK + C)$.

et al.,¹² and Stephenson and Malanowski.¹⁸ These are reproduced in Table 4. The fugacity coefficient was calculated by using the virial equation of state truncated after the second virial term. The second virial coefficient was determined by the Hayden–O’Connell method.¹⁹ The critical properties and other parameters required for estimating the second virial coefficients, obtained from Domanska et al.,²⁰ Nikitin et al.,²¹ Prausnitz et al.,²² Steele et al.,²³ and Yu et al.,³ are listed in Table 5. The value of the solvation parameter is taken as zero for the water + sulfolane system and 1.55 for the water + tetraethylene glycol system. The liquid molar volumes were calculated from the Hankinson–Brobst–Thomson equation.¹⁷

The calculated activity coefficients for the water + sulfolane mixture are also listed in Table 2. The experimental vapor–liquid equilibrium data for the water + sulfolane system were shown to be thermodynamically

Table 5. Critical Properties and Parameters Used in the Determination of the Second Virial Coefficients in the Vapor Phase, Where T_c Is the Critical Temperature, P_c Is the Critical Pressure, RD Is the Mean Radius of Gyration, DM Is the Dipole Moment, and η Is the Association Parameter

component	T_c/K	P_c/MPa	RD/nm	DM/D	η
water ^a	647.37	22.120	0.0615	1.83	1.70
sulfolane	855.0 ^b	7.290 ^b	0.2910 ^c	4.10 ^c	0.00
tetraethylene glycol	800.0 ^d	3.200 ^d	0.5054 ^e	5.84 ^e	1.55 ^e

^a Data from Prausnitz et al.²² ^b Data from Steele et al.²³ ^c Data from Domanska et al.²⁰ ^d Data from Nikitin et al.²¹ ^e Data from Yu et al.³

Table 6. UNIQUAC Pure Component Parameters for Volume (r) and Surface Area (q) of Each Compound²⁹

component	r	q
water	0.920	1.400
sulfolane	4.036	3.206
tetraethylene glycol	7.187	6.208

Table 7. Correlation Parameters and Absolute Average Deviations in Boiling Temperature (ΔT) and Vapor-Phase Mole Fraction (Δy) for the Binary Mixtures

model ^a	A_{12}/K^b	A_{21}/K^b	α_{12}	Δy^c	ΔT (%) ^d
Water (1) + Sulfolane (2)					
Wilson	824.61	-265.24		0.0006	0.165
NRTL	585.55	12.43	0.47	0.0002	0.041
UNIQUAC	-269.99	453.30		0.0002	0.139
Water (1) + Tetraethylene Glycol (2)					
Wilson	865.91	-959.28			0.146
NRTL	283.04	-294.44	0.47		0.118
UNIQUAC	-401.62	890.08			0.160

^a All models in $\ln \gamma$ form. ^b Energy parameters $A_{ji} = (\lambda_{ji} - \lambda_{ij})/R$ for the Wilson model, $A_{ji} = (g_{ji} - g_{ij})/R$ for the NRTL model, and $A_{ji} = (U_{ji} - U_{ij})/R$ for the UNIQUAC model. ^c $\Delta y = \sum_{j=1}^N |y_j^{\text{exp}} - y_j^{\text{calc}}|/N$. ^d $\Delta T = (100/N) \sum_{j=1}^N |T_j^{\text{exp}} - T_j^{\text{calc}}|/T_j^{\text{exp}}$, where N is the number of experimental points.

consistent by using a Herington analysis²⁴ with $(D - J) < 10$ and the test described by Fredenslund et al.²⁵ The activity coefficients of water in tetraethylene glycol were calculated by neglecting the amount of tetraethylene glycol present in the vapor phase. The values of γ_i for the water + tetraethylene glycol system are < 1 . This is in agreement with the result of Herskowitz and Gottlieb⁵ with an isopiestic method at 298.15 K.

The experimental vapor-liquid equilibrium data were then used to obtain the binary parameters in various activity coefficient models. The Wilson,²⁶ NRTL,²⁷ and UNIQUAC²⁸ models were used in the regressions. The UNIQUAC pure component parameters for the surface area (q) and volume (r) of the molecules were calculated from Walas²⁹ and are listed in Table 6. The following objective function was minimized in the regressions:

$$\text{OF} = \sum_{j=1}^N 100 \left[\frac{|T_j^{\text{exp}} - T_j^{\text{calc}}|}{T_j^{\text{exp}}} (1 - w) + w |y_j^{\text{exp}} - y_j^{\text{calc}}| \right] \quad (4)$$

where N is the number of experimental points, $w = 0.5$ for the water + sulfolane system, and $w = 0$ for the water + tetraethylene glycol system because the vapor-phase composition for the latter system was not measured in this work. The regression results are shown in Table 7. The deviations in vapor-phase compositions and equilibrium temperatures are reasonably small, and this indicates that all three activity coefficient models are suitable to represent

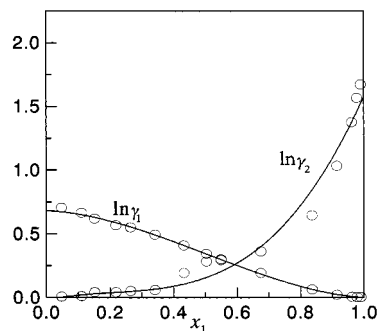


Figure 1. Activity coefficient curves for the system water (1) + sulfolane (2): comparison of experimental data (○) with the prediction of the NRTL model (—).

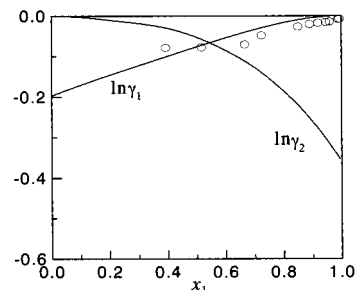


Figure 2. Activity coefficient curves for the system water (1) + tetraethylene glycol (2): comparison of experimental data (○) with the prediction of the NRTL model (—).

Table 8. Densities (ρ) and Excess Molar Volumes (V^E) for Binary Mixtures at 298.15 K

x_1	$\rho/$ $\text{g}\cdot\text{cm}^{-3}$	$V^E/$ $\text{cm}^3\cdot\text{mol}^{-1}$	x_1	$\rho/$ $\text{g}\cdot\text{cm}^{-3}$	$V^E/$ $\text{cm}^3\cdot\text{mol}^{-1}$
Water (1) + Sulfolane (2)					
0.0725	1.261 75	-0.003	0.6025	1.209 39	-0.156
0.1148	1.259 24	-0.005	0.6790	1.193 61	-0.181
0.1764	1.255 26	-0.009	0.7374	1.177 76	-0.184
0.2149	1.252 52	-0.011	0.8331	1.141 22	-0.174
0.2730	1.248 01	-0.017	0.8645	1.127 45	-0.162
0.3438	1.241 92	-0.035	0.9008	1.101 55	-0.141
0.4169	1.234 61	-0.058	0.9351	1.074 05	-0.112
0.4651	1.229 21	-0.082	0.9754	1.031 17	-0.052
0.5011	1.224 73	-0.101	0.9872	1.015 84	-0.031
0.5532	1.217 33	-0.125	0.9955	1.003 99	-0.013
Water (1) + Tetraethylene Glycol (2)					
0.0098	1.120 01	-0.012	0.7667	1.109 08	-0.999
0.0882	1.119 68	-0.121	0.8402	1.099 54	-0.898
0.1675	1.119 46	-0.254	0.8761	1.090 85	-0.786
0.2370	1.119 24	-0.371	0.9054	1.080 17	-0.653
0.2925	1.119 04	-0.464	0.9373	1.063 50	-0.480
0.4229	1.118 23	-0.664	0.9659	1.040 56	-0.278
0.4359	1.118 10	-0.681	0.9797	1.025 67	-0.170
0.5363	1.117 10	-0.828	0.9890	1.013 68	-0.093
0.6047	1.116 08	-0.921	0.9943	1.006 01	-0.048
0.7168	1.112 42	-1.006			
Benzene (1) + Tetraethylene Glycol (2)					
0.0667	1.111 89	-0.090	0.5371	1.030 79	-0.377
0.1235	1.104 35	-0.146	0.6183	1.010 68	-0.341
0.1685	1.098 08	-0.195	0.6670	0.997 42	-0.310
0.2134	1.091 50	-0.242	0.7296	0.978 81	-0.252
0.2539	1.085 24	-0.279	0.7970	0.956 68	-0.184
0.3326	1.072 13	-0.336	0.8664	0.931 36	-0.119
0.3860	1.062 45	-0.365	0.8920	0.921 26	-0.093
0.4368	1.052 54	-0.379	0.9936	0.903 89	-0.052
0.5015	1.038 87	-0.383			

the binary experimental data. The comparison between the experimental activity coefficients and the prediction by the NRTL model for the systems of water + sulfolane and water + tetraethylene glycol is shown in Figures 1 and 2.

Table 9. Values of the Coefficients of the Correlation Equation and Standard Deviations for Excess Molar Volumes at 298.15 K

system	a_1	a_2	a_3	a_4	a_5	$\sigma/\text{cm}^3\cdot\text{mol}^{-1}$
water + sulfolane	-0.4055	0.9482	-0.4255	-1.9606	-0.3636	0.0047
water + tetraethylene glycol	-3.1010	2.9614	-2.8107	1.2578	0.8707	0.0051
benzene + tetraethylene glycol	-1.5248	-0.1804	0.6230	-0.1367		0.0036

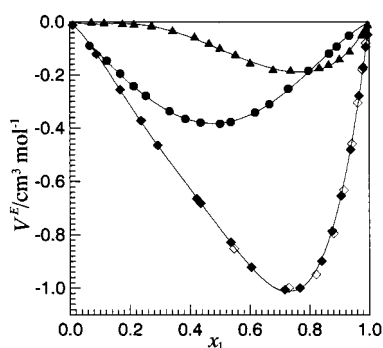


Figure 3. Excess molar volumes as a function of composition at 298.15 K for binary systems. Experimental points: (\blacktriangle) water (1) + sulfolane (2) (this work); (\bullet) benzene (1) + tetraethylene glycol (2) (this work); (\blacklozenge) water (1) + tetraethylene glycol (2) (this work); (\diamond) water (1) + tetraethylene glycol (2) (Müller and Rasmussen¹¹). The curves were calculated with eq 3.

The experimental densities and excess molar volumes for the binary mixtures of water + sulfolane, water + tetraethylene glycol, and benzene + tetraethylene glycol at 298.15 K are given in Table 8. The excess molar volume as a function of composition is graphically represented in Figure 3. The measured excess molar volumes V^E were fitted to the following expression by a least-squares method:

$$V^E = x_1(1 - x_1) \sum_{j=1}^m a_j (1 - 2x_1)^{j-1} \quad (5)$$

Coefficients a_j are given in Table 9 along with the standard deviation σ for each system, defined as

$$\sigma^2 = \frac{1}{N - m} \sum_{j=1}^N (V_j^{E,\text{calc}} - V_j^{E,\text{exp}})^2 \quad (6)$$

where m is the number of adjustable parameters a_j in eq 5. The superscripts calc and exp refer to the values calculated by using eqs 5 and 2, respectively.

The literature excess volumes for the water + tetraethylene glycol system reported by Müller and Rasmussen¹¹ are also included in Figure 3. Good agreement was seen between the literature values and the present data.

It can be seen from Table 8 that, for all cases, the excess volumes are negative. For the benzene + tetraethylene glycol system, the minimum excess molar volume occurs at $x \approx 0.5$, and it is shifted toward the water-rich region for the water + sulfolane and water + tetraethylene glycol systems, as shown in Figure 3. Excess molar volumes for aqueous tetraethylene glycol solutions are smaller than those for the other two systems studied; this can be interpreted as an increase in the order of the system due to the formation of hydrogen bonds between water and tetraethylene glycol molecules.

Conclusion

Vapor–liquid equilibria of two binary mixtures of water + sulfolane and water + tetraethylene glycol were measured at 101.33 kPa and tested by using the Herington

analysis²⁴ and the method of Fredenslund et al.²⁵ Analysis of the experimental vapor–liquid equilibrium data for the two binary systems (by using the Wilson, NRTL, and UNIQUAC models) shows that all three models generally give satisfactory results. Densities and excess volumes for three mixtures of water + sulfolane, water + tetraethylene glycol, and benzene + tetraethylene glycol were determined at 298.15 K. The excess volumes for the three binary systems were successfully correlated using the Redlich–Kister equation.

Literature Cited

- Hassan, M. S.; Fahim, M. A.; Mumford, C. J. Correlation of Phase Equilibria of Naphtha Reformate with Sulfolane. *J. Chem. Eng. Data* **1988**, *33*, 162–165.
- Hauschild, T.; Knapp, H. Liquid–Liquid-Equilibrium and Densities of Multicomponent Mixtures Containing Heptane-Ethylbenzene in Sulfolane. *J. Solution Chem.* **1991**, *20*, 125–138.
- Yu, Y.-X.; Liu, J.-G.; Gao, G.-H. Isobaric Vapor–Liquid Equilibria of Three Aromatic Hydrocarbon–Tetraethylene Glycol Binary Systems. *Fluid Phase Equilib.* **1999**, *157*, 299–307.
- Sørensen, J. M.; Arlt, M. *Liquid–Liquid Equilibria Data Collection*, Vol. V, Part 3; Frankfurt/Main: DECHEMA, 1980.
- Herskowitz, M.; Gottlieb, M. Vapor–Liquid Equilibrium in Aqueous Solutions of Various Glycols and Poly(ethylene glycols). 2. Tetraethylene Glycols and Estimation of UNIFAC Parameters. *J. Chem. Eng. Data* **1984**, *29*, 450–452.
- Jannelli, L.; Lopez, A.; Saiello, S. Thermodynamic and Physical Properties of Binary Mixtures Involving Sulfolane. Excess Volumes and Dielectric Constants of Benzonitrile–Sulfolane and Acetonitrile–Sulfolane Systems. *J. Chem. Eng. Data* **1980**, *25*, 259–263.
- Lopez, A.; Jannelli, L.; Silvestri, L. Thermodynamic Properties of Binary Mixtures Involving Sulfolane. 1. Excess Volumes on Mixing Sulfolane and Propionitrile, Butyronitrile, and Valeronitrile. *J. Chem. Eng. Data* **1982**, *27*, 183–186.
- Yu, Y.-X.; Li, Y.-G. Excess Molar Volumes of Sulfolane in Binary Mixtures with Six Aromatic Hydrocarbons at 298.15 K. *Fluid Phase Equilib.* **1998**, *147*, 207–213.
- Kumagai, A.; Mochida, H.; Takahashi, S. Liquid Viscosities and Densities of HFC-134a + Glycol Mixtures. *Int. J. Thermophys.* **1993**, *14*, 45–53.
- Lepori, L.; Mollica, V. Volumetric Properties of Dilute Aqueous Solutions of Poly(ethylene glycols). *J. Polym. Sci., Polym. Phys. Ed.* **1978**, *16*, 1123–1134.
- Müller, E. A.; Rasmussen, P. Densities and Excess Volumes in Aqueous Poly(ethylene glycol) Solutions. *J. Chem. Eng. Data* **1991**, *36*, 214–217.
- Riddick, J. A.; Bunger, W. B.; Sakano, T. K. *Organic Solvents. Physical Properties and Methods of Purification*, 4th ed.; John Wiley & Sons: New York, 1986.
- Daubert, T. E.; Danner, R. P. *Physical and Thermodynamic Properties of pure Chemicals: Data Compilation*; Hemisphere Publishing Corporation: New York, 1989.
- Zhou, X.; Ni, L.; Han, S. A Study on Pseudo-Static Method for VLE Determination. *J. Chem. Ind. Eng. (China)* **1990**, *41*, 122–126.
- Fermeglia, M.; Lapasin, R. Excess Volumes and Viscosities of Binary Mixtures of Organics. *J. Chem. Eng. Data* **1988**, *33*, 415–417.
- Yu, Y.-X.; Bao, T.-Z.; Gao, G.-H.; Li, Y.-G. Densities and Apparent Molar Volumes for Aqueous Solutions of $\text{HNO}_3\text{--UO}_2(\text{NO}_3)_2$ at 298.15 K. *J. Radioanal. Nucl. Chem.* **1999**, *241*, 373–377.
- Reid, R. C.; Prausnitz, J. M.; Poling, B. E. *The Properties of Gases and Liquids*, 4th ed.; McGraw-Hill: New York, 1987.
- Stephenson, R. M.; Malanowski, S. *Handbook of the Thermodynamics of Organic Compounds*; Elsevier: Amsterdam, 1987.
- Hayden, J. G.; O'Connell, J. P. A Generalized Method for Predicting Second Virial Coefficients. *Ind. Eng. Chem. Process Des. Dev.* **1975**, *14*, 209–216.
- Domanska, U.; Sporzynski, A.; Moollan, W. C.; Letcher, T. M. Vapor–Liquid Equilibria of Binary Mixtures Containing Sulfolane. *J. Chem. Eng. Data* **1996**, *41*, 624–628.

- (21) Nikitin, E. D.; Pavlov, P. A.; Popov, A. P. (Gas + Liquid) Critical Temperatures and Pressures of Polyethylene Glycols from HOCH₂-CH₂OH to H(OCH₂CH₂)_{v=13,2}OH. *J. Chem. Thermodyn.* **1995**, *27*, 43–51.
- (22) Prausnitz, J. M.; Anderson, T. F.; Grens, E. A.; Eckert, C. A.; Hsieh, R.; O'Connell, J. P. *Computer Calculations for Multi-component Vapor-Liquid and Liquid-Liquid Equilibria*; Prentice Hall: Upper Saddle River, New Jersey, 1980.
- (23) Steele, W. V.; Chirico, R. D.; Knipmeyer, S. E.; Nguyen, A. Vapor Pressure, Heat Capacity, and Density along the Saturated Line, Measurements for Cyclohexanol, 2-Cyclohexen-1-one, 1,2-Dichloropropane, 1,4-di-*tert*-Butylbenzene, (±)-2-Ethylhexanoic Acid, 2-(Methylamino)ethanol, Perfluoro-*n*-Heptane, and Sulfolane. *J. Chem. Eng. Data* **1997**, *42*, 1021–1036.
- (24) Herington, E. F. G. Tests for the Consistency of Experimental Isobaric Vapor-Liquid Equilibrium Data. *J. Inst. Pet.* **1951**, *37*, 457–470.
- (25) Fredenslund, A.; Gmehling, J.; Rasmussen, P. *Vapor-Liquid Equilibria Using UNIFAC*; Elsevier: Amsterdam, 1977.
- (26) Wilson, G. H. Vapor-Liquid Equilibrium. XI. A New Expression for Excess Free Energy of Mixing. *J. Am. Chem. Soc.* **1964**, *86*, 127–130.
- (27) Renon, H.; Prausnitz, J. M. Local Composition in Thermodynamics Excess Functions for Liquid Mixtures. *AIChE J.* **1968**, *14*, 135–144.
- (28) Abrams, D. S.; Prausnitz, J. M. Statistical Thermodynamics of Liquid Mixtures; A New Expression for the Excess Gibbs Energy of Partly or Completely Miscible Systems. *AIChE J.* **1975**, *21*, 116–128.
- (29) Walas, S. M. *Phase Equilibria in Chemical Engineering*; Butterworth Publishers: Boston, 1985.

Received for review October 11, 1999. Accepted March 21, 2000.
This work was supported by the State Key Laboratory of Chemical Engineering in China.

JE990276Q